


	<b>Shanghai Cummins Trade Co., Ltd.</b> Shanghai, China, 200030 <b>Marine Performance Curves</b>	Basic Engine Model <b>B5.9CMII190</b>	Curve Number: <b>M-FR96898</b>	
		Engine Configuration	CPL Code: <b>5571</b>	
		Date: <b>D403115MX03</b>		<b>15-Apr-19</b>

Displacement: **5.9 liter [359 in³]**      Rated Power: **140 kw [188 bhp]**  
 Bore: **102 mm [4.02 in]**      Rated Speed: **2200 rpm**  
 Stroke: **120 mm [4.72 in]**      Rating Type: **Continuous Duty**  
 Cylinders: **6**      Aspiration: **Turbocharged**  
 Fuel System: **HPCR**      110% Power: **154 kw [207 bhp]**

CERTIFIED: This diesel engine complies with or is certified to the following agencies requirements:

IMO Tier II (Two) NOx requirements of International Maritime Organization (IMO), MARPOL 73/78 Annex VI, Regulation 13  
 China Marine Emission Regulation Stage II GB15097-2016

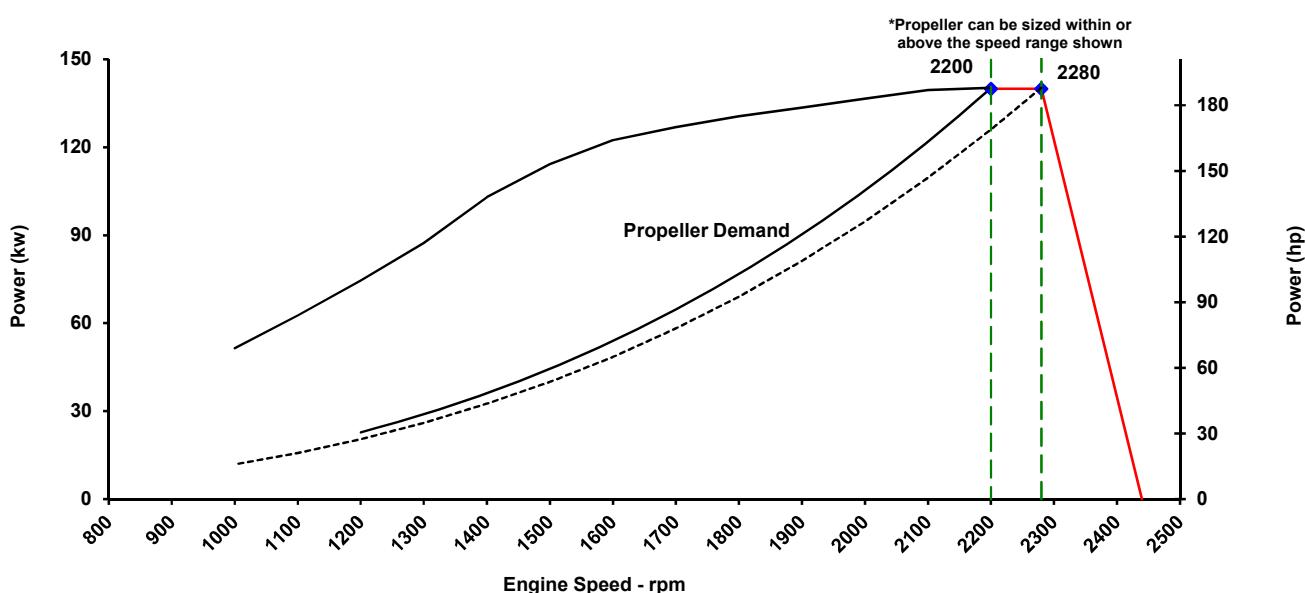

Speed	100% Throttle			Propeller Demand				
	Power	Torque	Power	Torque	Fuel Consumption			
rpm	kw (hp)	N·m (ft-lb)	kw (hp)	N·m (ft-lb)	L/hr (gal/hr)			
2280	140 (188)	586 (433)	140 (188.0)	608 (448)	37.8 (10)			
2200	140 (188)	608 (448)	140 (188.0)	608 (448)	37.8 (10)			
2100	139 (187)	633 (467)	122 (163.5)	555 (409)	33.4 (8.8)			
2000	136 (183)	653 (481)	105 (141.2)	503 (371)	29.3 (7.7)			
1900	133 (179)	673 (496)	90 (121.1)	454 (335)	24.5 (6.5)			
1800	130 (175)	693 (511)	77 (103.0)	407 (300)	22.2 (5.9)			
1700	127 (170)	713 (526)	65 (86.7)	363 (268)	18.3 (4.8)			
1600	122 (164)	728 (537)	54 (72.3)	321 (237)	14.4 (3.8)			
1500	114 (153)	728 (537)	44 (59.6)	283 (209)	11.6 (3.1)			
1400	103 (138)	703 (518)	36 (48.4)	247 (182)	10.2 (2.7)			
1300	87 (117)	643 (474)	29 (38.8)	213 (157)	8.2 (2.2)			
1200	75 (100)	593 (437)	23 (30.5)	182 (134)	6.2 (1.6)			
1100	63 (84)	543 (400)	18 (23.5)	152 (112)	5.0 (1.3)			
1000	51 (69)	493 (363)	13 (17.7)	126 (93)	4.0 (1)			

\* Cummins Full Throttle Requirements:

- Engine achieves or exceeds rated rpm at full throttle under any steady operating condition
- Engines in variable displacement boats (such as pushboats, tugboats, net draggers, etc.) achieve no less than 100 rpm below rated speed at full throttle during a dead push or bollard pull
- Engine achieves or exceeds rated rpm when accelerating from idle to full throttle

Rated Conditions: Ratings are based upon ISO 15550 reference conditions; air pressure of 100 kPa [29.612 in Hg], air temperature 25deg. C [77 deg. F] and 30% relative humidity. Member NMMA. Unless otherwise specified, tolerance on all values is +/-5%. Values from engine control modules and displayed on instrument panels are not absolute. Tolerance varies, but is generally less than +/-5% when operating within 30% of rated power.

Full Throttle curve represents power at the crankshaft for mature gross engine performance corrected in accordance with ISO 15550. Propeller Curve represents approximate power demand from a typical propeller. Propeller Shaft Power is approximately 3% less than rated crankshaft power after typical reverse/reduction gear losses and may vary depending on the type of gear or propulsion system used.

Fuel Consumption is based on fuel of 35 deg. API gravity at 16 deg C [60 deg. F] having LHV of 42,780 kJ/kg [18390 Btu/lb] and weighing 838.9 g/liter [7.001 lb/U.S. gal].

Continuous Rating (CON): Intended for continuous use in applications requiring uninterrupted service at full power. This rating is an ISO 15550 standard power rating.



APPLICATION ENGINEER

# Propulsion Marine Engine Performance Data

**Curve No.** M-FR96898  
**CPL :** 5571  
**DATE:** 15-Apr-19

## General Engine Data

Engine Model .....	B5.9CMII190
Rating Type .....	Continuous Duty
Rated Engine Power .....	kW [hp] 140 [188]
Rated Engine Speed .....	rpm 2200
Rated Power Production Tolerance .....	±% 3
Rated Engine Torque .....	N·m [lb·ft] 608 [449]
Peak Engine Torque @ 1500 rpm.....	N·m [lb·ft] 728 [537]
Brake Mean Effective Pressure .....	kPa [psi] 1300 [189]
Indicated Mean Effective Pressure.....	kPa [psi] 1520 [220]
Maximum Allowable Engine Speed .....	rpm 2440
Maximum Continuous Torque Capacity from Front of Crank Specifications	
Maximum Torque Capacity from Front of Crank <sup>2</sup> .....	N·m [lb·ft] [N.A.]
Compression Ratio .....	17.3:1
Piston Speed .....	m/sec [ft/min] 8.8 [1732]
Firing Order .....	1-5-3-6-2-4
Weight - Engine Only - Average .....	kg [lb] 543 [1197]
Weight - Engine With Heat Exchanger System - Average.....	kg [lb] 641 [1413]

## Governor Settings

Default Droop Value.....	Refer to MAB 2.04.00-03/23/2006 for Droop explanation	7%
Maximum Droop Allowed.....		16%
High Speed Governor Break Point.....	rpm	2280
Minimum Idle Speed Setting .....	rpm	750
Normal Idle Speed Variation .....	±rpm	50
High Idle Speed Range    Minimum .....	rpm	2280
Maximum .....	rpm	2400

## Noise and Vibration

1 m sound pressure level - GB/T1859 .....	< 93 dB
---	---------

## Lubrication System<sup>1</sup>

Max. Allowable Oil Temperature (Sump) .....	°C [°F]	124 [255]
Oil Pan Capacity (OP9314)		
Low/High.....	I/l	12.3 14.2
Min. Oil Pressure at idle speed.....	kPa [psi]	69 [10]
Maximum Operational Angularity of Oil Pan .....	degree	40

## Fuel System<sup>1</sup>

Fuel Consumption at Rated Speed .....	l/hr [gal/hr]	37.8 [10.0]
Approximate Fuel Flow to Pump .....	l/hr [gal/hr]	82 [21.6]
Maximum Allowable Fuel Supply to Pump Temperature .....	°C [°F]	80 [176]
Approximate Fuel Flow Return to Tank .....	l/hr [gal/hr]	21 [5.6]
Maximum Allowable Restriction to Fuel Pump		
Clean Filter .....	kPa [psi]	16 [2.3]
Dirty Filter .....	kPa [psi]	30 [4.4]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

- <sup>1</sup> Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.
- <sup>2</sup> No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.
- <sup>3</sup> Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.
- <sup>4</sup> Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.
- <sup>5</sup> May not be at rated load and speed. Maximum heat rejection may occur at other than rated conditions.

Shanghai Cummins Trade Co., Ltd.  
Shanghai, China, 200030

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<https://www.auts-power.com>

# Propulsion Marine Engine Performance Data

**Curve No.** M-FR96898  
**CPL :** 5571  
**DATE:** 15-Apr-19

## Air System<sup>1</sup>

Intake Manifold Pressure .....	.kPa [in Hg]	161 [48]
Intake Air Flow .....	l/sec [cfm]	183 [388]
Heat Rejection to Ambient <sup>5</sup> .....	kW [Btu/min]	17 [980]

## Exhaust System<sup>1</sup>

Exhaust Gas Flow .....	l/sec [cfm]	491 [1,040]
Exhaust Gas Temperature (Turbine Out) .....	°C [°F]	492 [916]
Max. Exhaust Pressure .....	.kPa [in Hg]	10 [3]

## Emissions (in accordance with ISO 8178 Cycle E3)

NOx (Oxides of Nitrogen) .....	g/kw·hr [g/hp·hr]	5.07 [3.78]
HC (Hydrocarbons) .....	g/kw·hr [g/hp·hr]	0.23 [0.17]
CO (Carbon Monoxide) .....	g/kw·hr [g/hp·hr]	1.50 [1.12]
PM (Particulate Matter) .....	g/kw·hr [g/hp·hr]	0.12 [0.09]

## Cooling System<sup>1</sup>

Sea Water Pump flow <sup>4</sup> ( Discharge Restriction Pressure 40 kPa ).....	m <sup>3</sup> /hr	11.4
Pressure Cap Rating (With Heat Exchanger Option) .....	.kPa [psi]	48 [7]
Max. Pressure Drop Across Any External Cooling System Circuit .....	.kPa [psi]	34 [5]
<b>Jacket Water Aftercooled Engine (JWAC)</b>		
Coolant Flow to Engine Heat Exchanger .....	l/min [gal/min]	165 [43.6]
Standard Thermostat Operating Range (Start to Open) .....	°C [°F]	71 [160]
Standard Thermostat Operating Range (Full Open) .....	°C [°F]	83 [182]
Heat Rejection to Engine Coolant <sup>3</sup> .....	kW [Btu/min]	88 [4991]
Coolant Capacity		
Engine Only.....	l [gal]	9 [2.4]

## Electrical and Start System

Voltage.....	V	24
Cold Soak at -18°C (0°F) -Cold Cranking Amperes Rating .....	CCA	600
Maximum Allowable Resistance of Starting Circuit .....	Ohms	2
Min. start temperature without cold starting aid .....	°C [°F]	-12 [-10]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

<sup>1</sup> Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.

<sup>2</sup> No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.

<sup>3</sup> Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.

<sup>4</sup> Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

<sup>5</sup> May not be at rated load and speed. Maximum heat rejection may occur at other than rated conditions.

Shanghai Cummins Trade Co., Ltd.

Shanghai, China, 200030

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<https://www.auts-power.com/>